


## Quest VIII Premium Dock arch replacement

QSM-0736


**Tools Required: Phillips head screw driver.**

- 1) Ensure the dock is powered off and all the cables from the IO ports are disconnected. Locate the 2 M3 screws on the bottom of the arch and remove the screws. Remove the arch.

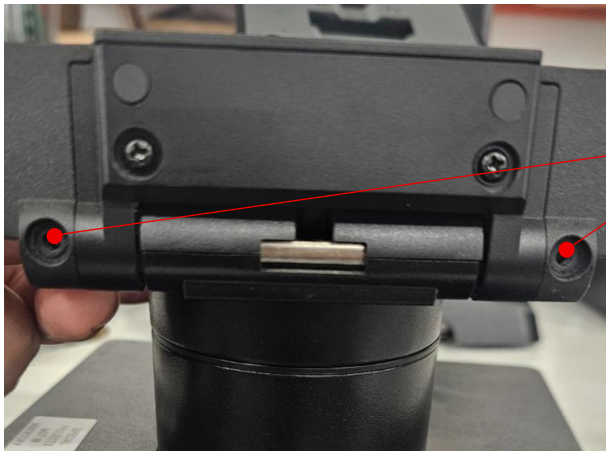

Remove the 2 screws

- 2) Locate the 3 rubber caps under the arch. Using a prying tool, remove the rubber caps to expose the 3 screws. Remove the 3 screws. Remove the arch from the locking tab assembly by sliding it off the guide pins.

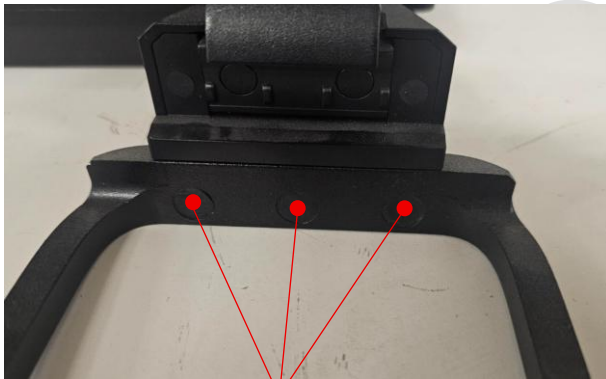

Remove the 3 rubber caps  
and remove the 3 screws



Slide to disconnect the arch  
from the locking tab assembly

- 3) Reassemble the arch in the reverse order. Do not over-torque the screws.