3-in-1 installation guide

Make note of where the terminal's cables are connected so you can place them back in the correct locations at the end of the process:



Figure 1

Loosen the thumb screw and slide the stand away from the IO panel to release it from the system:



Figure 2

Remove the set screw from the stand and remove the cover or Customer Display (if installed):



Figure 3

Feed the 3-in-1 display cable through the stand as shown:



Figure 4

Slide the two alignment screws on the display bracket into position:

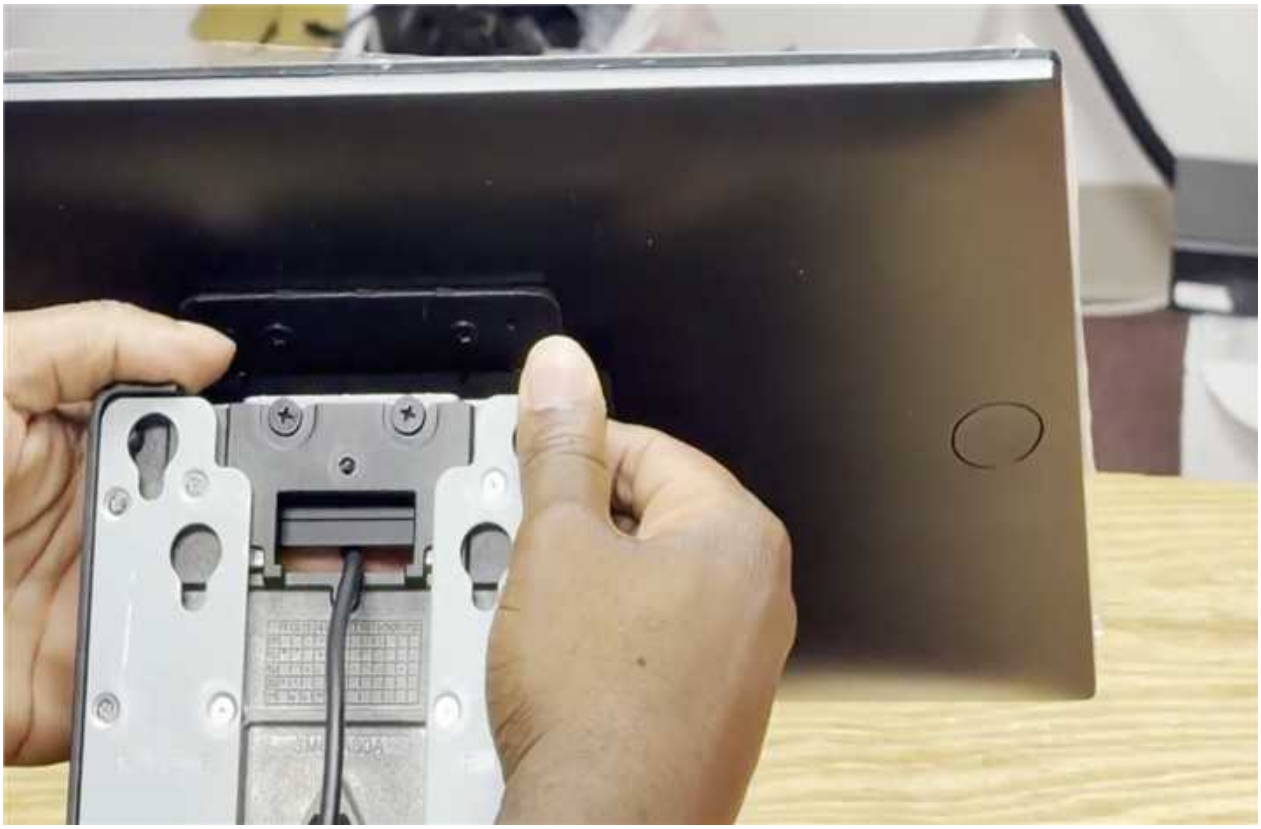


Figure 5

Replace the set screw and hand tighten it with a Phillips screwdriver. Then hand tighten the two alignment screws:



Figure 6

Guide the customer display cable through the channel at the bottom of the terminal stand.



Figure 7

Then place the terminal back onto the stand, aligning the four mounting pegs and sliding the terminal down towards the base. Use minimal force to seat the mounting pegs.

Take care not to pinch the display's cable when replacing the terminal:



Figure 8

and secure the thumb screw :



Figure 9

Plug the 3-in-1 display in to the 'Display Port' on the

terminal:



Figure 10

Replace the terminal's cables in their correct locations:



Figure 11